

# Urinal

Wall Hung Style



Our budget wall hung urinal style is fabricated from single piece 304 grade stainless steel in an attractive and durable design. The wall hung style offers the advantages of easy installation and maintenance. Perfect for temporary or transportable facilities and ablution blocks. Inbuilt fixings allow unit to be fastened directly to wall without requirement for brackets. Comes supplied with removable domed outlet grate. WELS and WaterMark certified.

## Design Features

- Economical model
- WELS & WaterMark certified
- 1.2mm 304 grade S.S. No. 4 satin finish
- Integrated full length sparge including side wall flushing
- Top or back 27.5mm inlet
- 67mm outlet with removable dome shaped grate
- Available in a range of standard sizes
- Custom lengths made to order

### Sample Spec

SIMCRAFT Products S.S. Wall Style Urinal - XXXXL with top entry inlet and outlet positioned in the centre of the urinal.

1.5

Urinals - Wall Hung Style


# Options

Size: 6 standard sizes or custom-made


Flush pipe: Top entry

Outlet position: Centre


## Plan

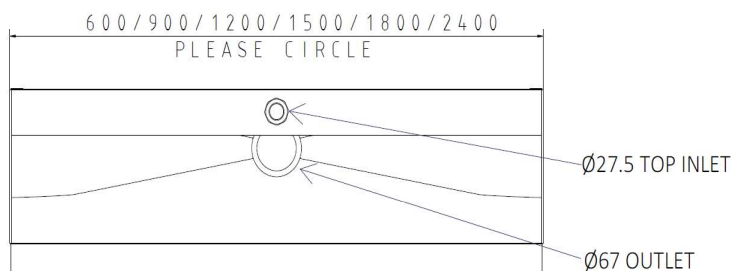

## Section A

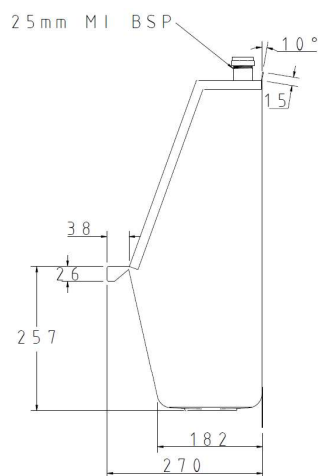

## Front Elevation

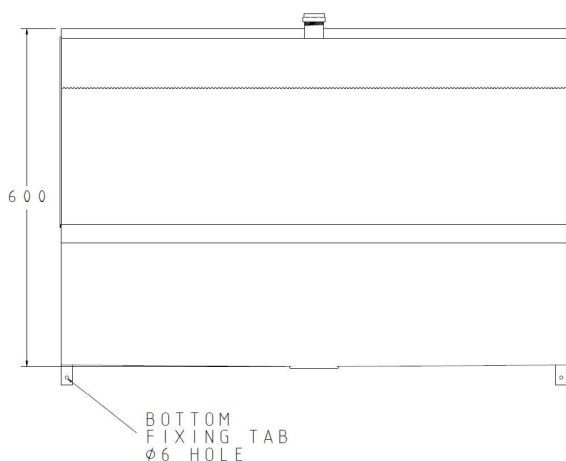

# Standard Sizes

450

600

900

1200

1800

2100

2400

## How to order

WHU . 1200 . TE . CN

A B C D

Wall Hung Style Urinal, 1800mm Long,  
Back Inlet, Right Hand Waste Outlet

## Order Key

A = Product Code

B = Urinal Length (mm)

C = Inlet Entry

TE: Top Inlet

RE: Back Inlet

D = Waste Outlet Position

LH: Left Hand Outlet

RH: Right Hand Outlet

CN: Centre Outlet -

\* 450 & 600mm urinal has centre outlet option only

## Water Inlets for Urinals

600mm - 2399mm = 1 inlet

2400mm - 4799mm = 2 inlets

4800mm - 6000mm = 3 inlets

[www.simcraftproducts.com.au](http://www.simcraftproducts.com.au)

(08) 9258 3033

[quotes@simcraftproducts.com.au](mailto:quotes@simcraftproducts.com.au)

Simcraft Products  
108 Radium Street,  
Welshpool WA 6016



**SIMCRAFT**

Details are subject to change without notice. Please refer to [simcraftproducts.com.au](http://simcraftproducts.com.au) for the most current information. Allow +/- 5mm tolerance for dimensions

Certified System

Quality  
ISO 9001